




144 312 13 706 | anthracite

multi.flood
masttop luminaire
LED | 112 W 3000 K

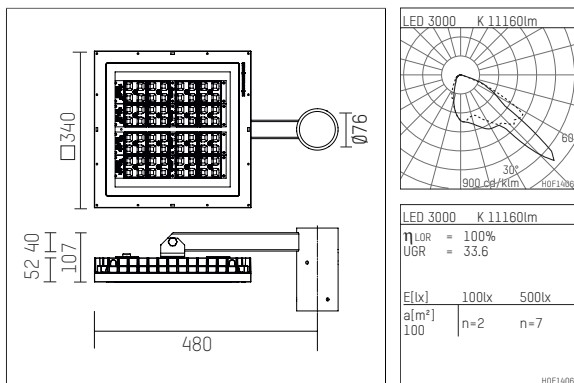

- masttop luminaire multi.flood
- Multifunctional luminaire system, IP65
- optics for pedestrian crossings
- with LED 15725 lm
- colour temperature: 3000 K
- colour rendering index: CRI >80
- L90 / B10 (100.000 / t_a 25°C)
- SDCM < 4
- net luminous flux: 11160 lm
- total load: 112 W
- luminous efficacy: 99,6 lm/W
- bidirectional light distribution
- with external power unit for mounting in pole, electronic, 220-240 V, 50/60 Hz
- optional DALI, overvoltage protection 6KV
- power supply: 5-pole supply cord 1,5 mm², length: 1500 mm
- secondary connection:
- 4-pole supply cord, length: 10000 mm
- housing of cast aluminium
- safety glass, clear
- width: 340 mm, height: 107 mm
- overhang: 480 mm, pole top diameter: 76 mm
- weight: 9,4 kg
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 35 °C
- impact resistance class: IK07
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: anthracite (RAL7016)
- 144 312 13 706
